




MAINLINE®

Flow Activated Trap Primer Valve

Product Specifications

FEATURES

- Designed for 1 to 4 floor drain trap seal applications
- Must be installed on the cold water line leading to the plumbing fixture
- Activated when sensing potable water flowing at an adjacent plumbing fixture
- Equipped with vacuum breaker ports and internal back-flow protection
- Operating Range: 20 psi minimum to 80 psi (138 to 552 kpa) max
- AB1953 Compliant
- Factory pre-set and 100% function tested
- Material: C68020 lead-free brass body, C69300 lead-free ECO brass cap, Neoperl check valve, Grey PVC check valve adapter, Nitrile O-Rings, Stainless steel screen

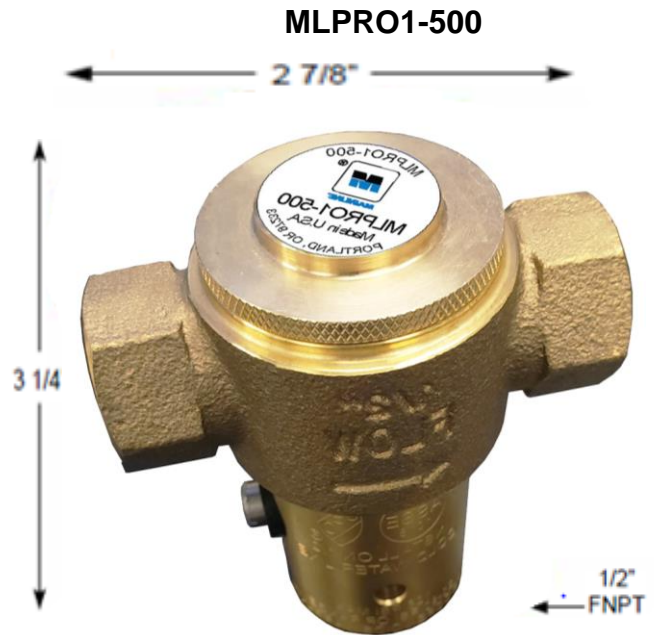

MLPRO1-500 Floor Drain Trap Primer Dist. Chart

# of Drains	Supply Tube	Distribution Units
1	N/A	N/A
2	N/A	MLDU-U
3	N/A	MLDU-U
4	N/A	MLDU-U

Minimum discharge rate when flow is activated for 5 seconds at 20 PSI is 0.845 oz.
 Minimum discharge rate when flow is activated for 5 seconds at 80 PSI is 1.65 oz.
 Minimum in-line flow through the valve is .25 gpm. Maximum 7 gpm

Warranty

See warranty information for more details.

All dimensions listed are nominal. MAINLINE® reserves the right to make product and material changes at any time without notice.



Contact your sales representative for more information or visit our website at mainlinecollection.com