



MAINLINE®



Reliably Comfortable.® 

MLT701i

Single Stage - WIFI

1 Heat, 1 Cool
Hardwire Only

Programmable Through App

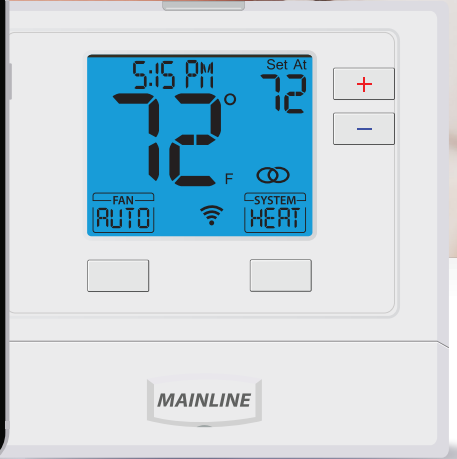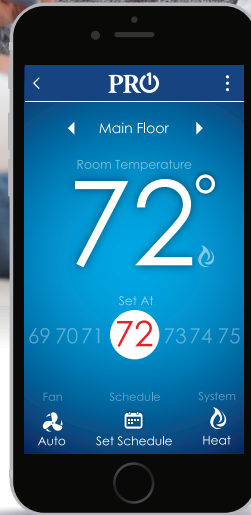

MLT701i

Reliably Comfortable.®



Universal Subbase

All Mainline thermostats have the same size footprint, making model upgrading a breeze. No wiring and no painting necessary.



Private Label Badge


All Mainline thermostats share a removable badge system that can be easily replaced with a custom badge that has your company's contact information. This free service is a great way to generate future business for your company.



Exclusively For Professionals

You don't have to compete with the giant big-box retailers. We sell our products exclusively to professional HVAC distributors.

MLT701i Specifications

 Model #	FC Fully Customizable in App 7D 7 Day Programmable 5/1/1 5/1/1 Programmable NP Non-Programmable	Stages of Heat	Stages of Cool	Heat pump with emergency heat compatible	Compatible with Conventional Systems	Display Size (Square Inches)	Auto Changeover	Filter Change Reminder	Room Temperature Calibration	Adjustable Temperature	Programmable Swing	Adjustable Setpoint Limits	Humidity Control	Memory Type (Permanent)	Touchscreen	Warranty (Years)	Remote-Sensor Capable	Terminals
		MLT701i	FC	1	1	•	4		•	•				•		5		

Specifications

The display range of temperature	41°F to 95°F (5°C to 35°C)
The control range of temperature.....	44°F to 90°F (7°C to 32°C)
Load Rating.....	1 amp per terminal, 1.5 amp maximum all terminals combined
Swing (cycle rate differential).....	Heating is adjustable from 0.2° to 2.0° Cooling is adjustable from 0.2° to 2.0°
Power source	18 to 30 VAC, NEC Class II, 50/60 Hz for hardwire. 500 mA
Operating ambient	32°F to +105°F (0°C to +41°C)
Operating humidity	90% non-condensing maximum
Dimensions of thermostat	4.7" W x 4.3" H x 0.9" D
Frequency Range.....	2.4 GHz ISM radio band
WIFI	Supporting 802.11 B/G/N Standards



Rev. 1919