


Heavy Hex Nut

Product Specifications



PRODUCT FEATURES

- Plain Finish or Zinc Plated

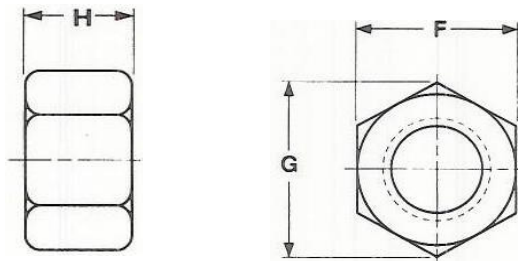

Basic Diameter		F			G		H		
		Width Across Flats			Width Across Corners		Thickness of Hex Nuts		
		Basic	Max	Min	Max	Min	Basic	Max	Min
1/4	0.2500	1/2	0.500	0.488	0.577	0.556	15.64	0.250	0.218
5/16	0.3125	9/16	0.562	0.546	0.650	0.622	19.64	0.314	0.280
3/8	0.3750	11/16	0.688	0.669	0.794	0.763	23/64	0.377	0.341
7/16	0.4375	3/4	0.750	0.728	0.866	0.830	27/64	0.441	0.403
1/2	0.5000	7/8	0.875	0.850	1.010	0.969	31/64	0.504	0.464
9/16	0.5625	15/16	0.938	0.909	1.083	1.037	35/64	0.568	0.526
5/8	0.6250	1-1/16	1.062	1.031	1.227	1.175	39/64	0.631	0.587
3/4	0.7500	1-1/4	1.250	1.212	1.443	1.382	47/64	0.758	0.710
7/8	0.8750	1-7/16	1.438	1.394	1.660	1.589	55/64	0.885	0.833
1	1.0000	1-5/8	1.625	1.575	1.876	1.796	63/64	1.012	0.956

ANSI/ASME B18.2.2

Material	Low Carbon Steel-Requirements--Carbon: 0.55% Maximum; Phosphorus: 0.12% Maximum; Sulfur: 0.023% maximum
Hardness	Rockwell B68 - C32
Proof Load	Coarse Thread 100,000 psi; Fine Thread 90,000 psi

Warranty: See warranty information for more details.

All dimensions listed are nominal. MAINLINE® reserves the right to make product and material changes at any time without notice.

Contact your sales representative for more information or visit our website at mainlinecollection.com