MAINLINE®
Reliably Comfortable.™

Performance® Gas Furnaces

MP921W

92% A.F.U.E.†
Heating Stages: Single Stage
Motor Type: Constant CFM
Input Rates: 40 to 115 kBTU [11.7 to 33.7 kW]
Configuration Options: 4-Way Multi-Position

Manufactured for
Mainline®
HVACmainline.com

ISO 9001:2015

c UL us LISTED

ENERGY STAR QUALIFIED ONLY IN U.S. SOUTH: AL, AZ, AR, CA, DC, DE, FL, GA, HI, KY, LA, MD, MS, NV, NM, NC, OK, SC, TN, TX, VA [1]

Dual Fuel The Choice Is Yours

† A.F.U.E. (Annual Fuel Utilization Efficiency) calculated in accordance with Department of Energy test procedures.

[1]*Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet ENERGY STAR®. Ask your Contractor for details or visit www.energystar.gov.*

Table of Contents

Features and Benefits 3
Model Number Identification 4
Physical Data and Specifications 5
Dimensional Data 6
Blower Performance Data 7
Accessories 8
Limited Warranty 9

Features and Benefits

- **Energy Efficiency:** US South ENERGY STAR® certified, featuring 92% AFUE across all model sizes
- **Diagnostics:** With the BluArch™ Contractor App, built-in Bluetooth®[1] technology makes monitoring, troubleshooting and repairing the product easier than ever before
- **Dip Switch Free Installation Commissioning via Bluetooth® Technology:** Seamless final install step without DIP switch configuration using the BluArch™ Contractor App
- **Ignition System:** Proven Direct Spark Ignition (DSI) for reliability and longevity
- **Water Management System:** Patented block drain sensor that automatically shuts off the furnace when the drain is blocked, and also alerts the contractor via diagnostic code
- **Constant CFM:** Truly variable speed technology allows for ultimate humidity control, quieter sound levels and year-round energy savings

[1]*The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks is under license. Other trademarks and trade names are those of their respective owners.*

Gas Furnaces

MP	92	1	W	040	3	A	17	M4	S	B	A	S
Brand	**Furnace Efficiency**	**Stages of Heating**	**Motor Type**	**Heating Input**	**AC Max. Capacity**	**Major Series**	**Width**	**Position**	**NOx**	**Controls**	**Minor Series**	**Option Code**
MP - Mainline Performance®	92 - 92% AFUE	1 - Single Stage	W - Constant CFM	040 - 40K BTUH [11.7 kW] 060 - 60K BTUH [17.6 kW] 070 - 70K BTUH [20.5 kW] 085 - 85K BTUH [24.9 kW] 100 - 100K BTUH [29.3 kW] 115 - 115K BTUH [33.7 kW]	3 - 3 ton drive 5 - 5 ton drive	A - 1st Design Series	17 - 17.5" Width 21 - 21" Width 24 - 24.5" Width	M4 - Multi-4 Way	S - Standard	B - Communicating, Bluetooth®	A - 1st Series	S - Standard Grade

[ ] Designates Metric Conversions

AVAILABLE MODELS
MP921W0403A17M4SBAS
MP921W0603A17M4SBAS
MP921W0703A17M4SBAS
MP921W0705A21M4SBAS
MP921W0855A21M4SBAS
MP921W1005A21M4SBAS
MP921W1155A24M4SBAS

STANDARD EQUIPMENT
100% safety lock out
29-4C stainless steel secondary heat exchanger design
Adjustable cool fan off delay
Aluminized steel primary heat exchanger design
Blocked Drain Sensor
Blower compartment door safety switch
Bluetooth® setup and diagnostics
Completely assembled and wired
Direct drive motor
Electronic on/off blower time control
Fully insulated heat exchanger cabinet
Humidistat terminal connection
Induced draft motor
Limit controls
Low speed continuous fan option
Manual shut-off valve
Marked condensate hoses
One hour automatic retry
Power and self test diagnostics
Pressure switch
PWM Controlled constant torque electrically commutated blower motor
Redundant main gas control
Single stage heating thermostat connection
Two plus stage cooling thermostat connection[1]

[1]When connected to three-speed or modulating AC/HP product

WARNING
THIS FURNACE IS NOT APPROVED
OR RECOMMENDED
FOR USE IN MOBILE HOMES

Physical Data and Specifications—U.S. Models

MODEL NUMBERS	MP921W0403 A17M4SBAS	MP921W0603 A17M4SBAS	MP921W0703 A17M4SBAS	MP921W0705 A21M4SBAS	MP921W0855 A21M4SBAS	MP921W1005 A21M4SBAS	MP921W1155 A24M4SBAS
HIGH FIRE INPUT BTU/HR [kW] ①	42,000 [12.30]	56,000 [16.41]	70,000 [20.51]	70,000 [20.51]	84,000 [24.61]	98,000 [28.72]	112,000 [32.82]
HEATING CAPACITY BTU/HR [kW]	39,900 [11.69]	53,200 [15.59]	66,500 [19.49]	66,500 [19.49]	79,800 [23.39]	93,100 [27.28]	106,400 [31.18]
HIGH ALTITUDE OUTPUT 10% DERATE [kW] ②	35,910 [10.52]	47,880 [14.03]	59,850 [17.54]	59,850 [17.54]	71,820 [21.05]	83,790 [24.56]	95,760 [28.06]
BLOWER (D x W) [mm]	11 x 7 [279 x 178]	11 x 8 [279 x 203]	11 x 8 [279 x 203]	11 x 10 [279 x 254]	11 x 10 [279 x 254]	11 x 10 [279 x 254]	11 x 11 [279 x 279]
MOTOR H.P. [W]–TYPE	1/2 [373] VS-CT(ECM)	1/2 [373] VS-CT(ECM)	1/2 [373] VS-CT(ECM)	1 [746] VS-CT(ECM)	1 [746] VS-CT(ECM)	1 [746] VS-CT(ECM)	1 [746] VS-CT(ECM)
MIN. CIRCUIT AMPACITY	10	10	10	17	17	17	17
MIN. OVERLOAD PROTECTION DEVICE	15	15	15	20	20	25	20
MAX. OVERLOAD PROTECTION DEVICE	15	15	15	20	20	20	20
Motor Full Load Amps	6.1	6.1	6.1	12.4	12.4	12.4	12.4
MAXIMUM EXT. STATIC PRESSURE (IN. W.C.) [kPa]	1.0 [0.25]	1.0 [0.25]	1.0 [0.25]	1.0 [0.25]	1.0 [0.25]	1.0 [0.25]	1.0 [0.25]
HEATING CFM [L/s]	990 [468]	1100 [520]	1200 [566]	1375 [649]	1735 [819]	1440 [680]	1650 [779]
MAX Cooling CFM [L/s]	1240 [585]	1240 [585]	1240 [585]	1980 [934]	1980 [934]	1980 [934]	1980 [934]
MIN Cooling CFM [L/s]	300 [142]	300 [142]	300 [142]	500 [236]	500 [236]	500 [236]	500 [236]
Fan CFM [L/s]	600 [283]	600 [283]	600 [283]	1000 [472]	1000 [472]	1000 [472]	1000 [472]
TEMPERATURE RISE-HIGH FIRE RANGE IN DEGREES °F [°C]	20 - 50 [11 - 28]	30 - 60 [17 - 33]	40 - 70 [22 - 39]	30 - 60 [17 - 33]	40 - 70 [23 - 39]	40 - 70 [22 - 39]	45 - 75 [25 - 42]
APPROX. SHIPPING WEIGHT (LBS.) [kg]	123 [56]	128 [58]	133.5 [61]	146.5 [66]	150 [68]	155 [70]	190 [86.2]
AFUE ③	92.00%	92.00%	92.00%	92.00%	92.00%	92.00%	92.00%

NOTES: All models are 115V, 60HZ, 1 phase Gas connection size for all models is 1/2" [13 mm] N.P.T.

① Installation instructions for high altitude derate.

② Canadian installations only.

③ In accordance with D.O.E. test procedures.

NOTE: Standard model complies with California low nox requirements up to 40ng/J.

This furnace does not meet air district requirements of 14 ng/J NOx emissions limit, and thus is subject to a mitigation fee of up to $450.

This furnace is to be installed for propane firing only in air districts requiring 14 ng/J NOx emission limits. Operating in natural gas mode is in violation of these Rules.

[ ] Designates Metric Conversions

Multi-Position Application

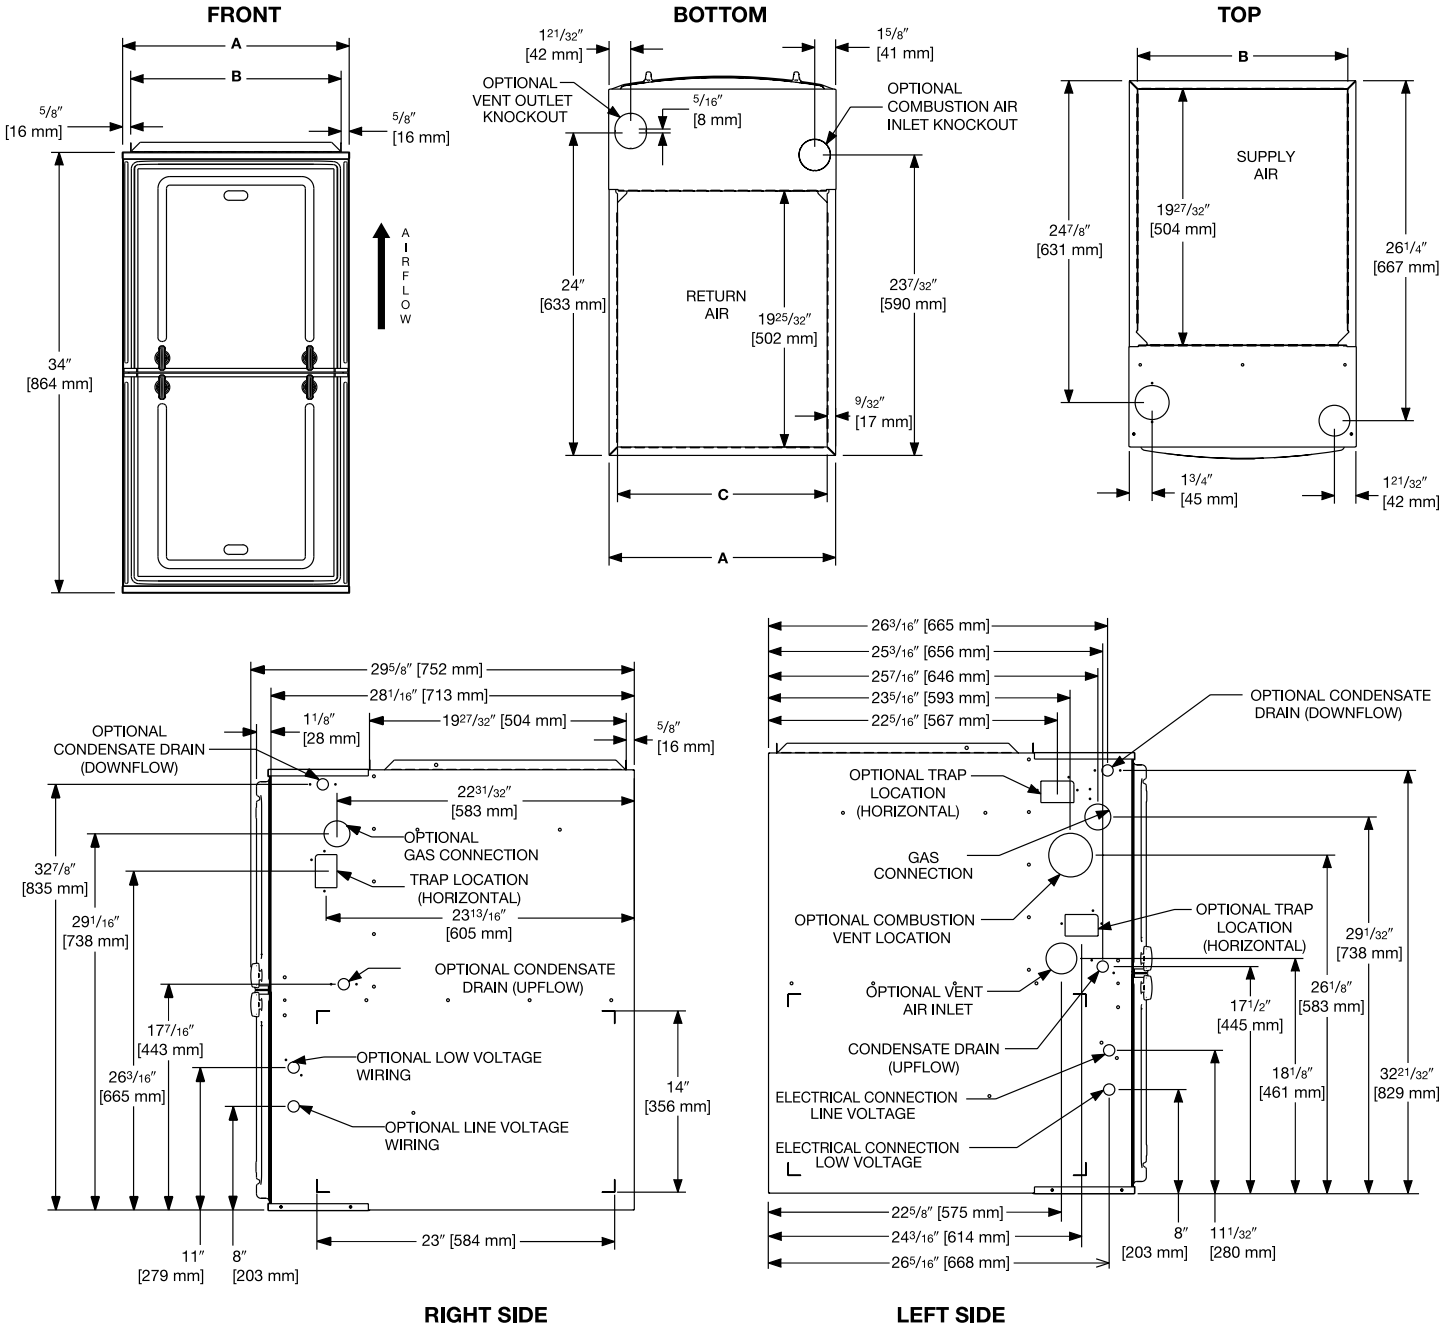

Unit Dimensions (Clearance To Combustibles)

MODEL MP921W	LEFT SIDE	MINIMUM CLEARANCE (IN.) [mm]					SHIP WGTS.	FLANGE DIMENSIONS		
		RIGHT SIDE	BACK	TOP	FRONT	VENT		A	B	C
040	0	0	0	1 [25]	2 [51]	0	123.5 [56]	171/2 [445]	1617/64 [413]	1613/64 [412]
060	0	0	0	1 [25]	2 [51]	0	128 [58]	171/2 [445]	1617/64 [413]	1613/64 [412]
070	0	0	0	1 [25]	2 [51]	0	132 [60]	171/2 [445]	1617/64 [413]	1613/64 [412]
070 (wide)	0	0	0	1 [25]	2 [51]	0	147.5 [67]	21 [533]	1949/64 [502]	1945/64 [500]
085	0	0	0	1 [25]	2 [51]	0	147.5 [67]	21 [533]	1949/64 [502]	1945/64 [500]
100	0	0	0	1 [25]	2 [51]	0	152 [69]	21 [533]	1949/64 [502]	1945/64 [500]
115	0	0	0	1 [25]	2 [51]	0	165 [75]	241/2 [662]	2317/64 [591]	2313/64 [589]

*A service clearance of at least 24" is recommended in front of all furnaces
Supply and return depicted as upflow configuration.
Flange configuration will vary depending on installation orientation.

[ ] Designates Metric Conversions

Blower Performance Data

TARGET GAS HEATING AIRFLOWS							
	MP921W0403 A17M4SBAS	**MP921W0603 A17M4SBAS**	**MP921W0703 A17M4SBAS**	**MP921W0705 A21M4SBAS**	**MP921W0855 A21M4SBAS**	**MP921W1005 A21M4SBAS**	**MP921W1155 A24M4SBAS**
Furnace Hi Heat CFM A (factory)	990 [468]	1100 [520]	1200 [566]	1375 [649]	1735 [819]	1440 [680]	1650 [779]
Furnace Hi Heat CFM B (side return)	990 [468]	1188 [561]	1296 [612]	1550 [732]	1874 [884]	1691 [798]	1800 [850]
Furnace Hi Heat CFM C (Approx. +7°F)	891 [421]	990 [468]	1080 [510]	1238 [584]	1562 [737]	1296 [612]	1485 [701]
Furnace Hi Heat CFM D (Approx. +12°F)	822 [388]	913 [431]	996 [470]	1141 [539]	1440 [680]	1195 [564]	1370 [647]

[ ] Designates Metric Conversions

Vent Termination Kits:

RXGY-E02: Vertical/Horizontal Concentric Vent Termination Kit 2" Pipe (US Only)

RXGY-E02A: Vertical/Horizontal Concentric Vent Termination Kit 2" Pipe (US & Canadian)

RXGY-E03: Vertical/Horizontal Concentric Vent Termination Kit 3" Pipe (US Only)

RXGY-E03A: Vertical/Horizontal Concentric Vent Termination Kit 3" Pipe (US & Canadian)

RXGY-G02: Direct Vent Furnace Side Wall Vent 2" or 3" (US Only)

RXGY-D05: Combustion Air Drain Kit 2"

RXGY-D06: Combustion Air Drain Kit 3"

NEUTRALIZER KIT: RXGY-A01
(Replacement Cartridge 54-22120-01)

EXTERNAL BOTTOM FILTER (UPFLOW/HORIZONTAL) RACK: RXGF-CB

EXTERNAL SIDE (UPFLOW) FILTER RACK: RXGF-CD

EXTERNAL (DOWNFLOW) FILTER RACK: RXGF-CC

FILTER RACK FILTER SIZES* INCHES [mm]			
MODEL	**RXGF-CB (UPFLOW/ HORIZONTAL)**	**RXGF-CD (UPFLOW)**	**RXGF-CC (DOWNFLOW)**
MP921W(-)040	15 3/4 x 25 [400 x 635]	15 3/4 x 25 [400 x 635]	14 x 20 [356 x 508]
MP921W(-)060	15 3/4 x 25 [400 x 635]	15 3/4 x 25 [400 x 635]	14 x 20 [356 x 508]
MP921W(-)070	15 3/4 x 25 [400 x 635]	15 3/4 x 25 [400 x 635]	14 x 20 [356 x 508]
MP921W(-)070 (wide)	19 1/4 x 25 [489 x 635]	15 3/4 x 25 [400 x 635]	12 x 20 [305 x 508]
MP921W(-)085	19 1/4 x 25 [489 x 635]	15 3/4 x 25 [400 x 635]	14 x 20 [356 x 508]
MP921W(-)100	19 1/4 x 25 [489 x 635]	15 3/4 x 25 [400 x 635]	14 x 20 [356 x 508]
MP921W(-)115	22 3/4 x 25 [578 x 635]	15 3/4 x 25 [400 x 635]	14 x 20 [356 x 508]

[ ] Designates Metric Conversions

Indoor Coil Casings

MODEL NUMBER
RXBC-D17A1
RXBC-D21A1
RXBC-D21B1
RXBC-D24A1

For High Altitudes:

NOTE: For Canadian installations only, an optional derate (manifold gas pressure reduction) method may be used to adjust the furnace for altitude. See Installation Instructions for more information. This optional method may **NOT** be used for U.S. installations. See installation instructions as appropriate orifice change is required.

L.P. CONVERSION KIT: RXGJ-FP38

CONDENSATE PUMP KIT: PROSTOCK & 1PCB151TUL

DOWNFLOW/HORIZONTAL CONVERSION KIT: RXGY-CK

DOWNFLOW/HORIZONTAL LEFT ZERO CLEARANCE CONVERSION KIT: RXGY-ZK

COMBUSTIBLE FLOOR BASE: RXGC-B17
RXGC-B21
RXGC-B24

MAINLINE®
Reliably Comfortable.™

GENERAL TERMS OF LIMITED WARRANTY*

Mainline® will furnish a replacement for any part of this product which fails in normal use and service within the applicable period stated, in accordance with the terms of the limited warranty.

***For complete details of the Limited and Conditional Warranties, including applicable terms and conditions, contact your local contractor or the Manufacturer for a copy of the product warranty certificate.**

Conditional Parts
(Registration Required).....Ten (10) Years
Heat Exchanger ..... Fifteen (15) Years

Before proceeding with installation, refer to installation instructions packaged with each model, as well as complying with all Federal, State, Provincial, and Local codes, regulations, and practices.

"In keeping with its policy of continuous progress and product improvement, Mainline reserves the right to make changes without notice."

www.MainlineCollection.com

PRINTED IN U.S.A. 5/25 QG FORM NO. GMP-679 REV. 4